


Cobra Plus Grade 10 Chain Sling and Component Specifications

G10 Short Link Chain




Product Code	W.L.L.	M.P.L.	M.B.L.	dn	D	W1 (min)	W2 (max)	Bend Deflection	Weight
	t	kN	kN	mm	mm	mm	mm	mm min (F)	kgs/m
G100C6	1.4	35.3	56.5	6	18	7.8	22.2	4.8	0.87
G100C8	2.5	62.8	101	8	24	10.4	29.6	6.4	1.5
G100C10	4	98.1	157	10	30	13	37	8	2.43
G100C13	6.7	166	265	13	39	16.9	48.1	10	4.1
G100C16	10	251	402	16	48	20.8	59.2	13	13

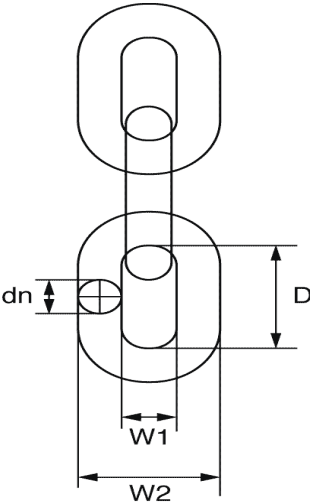

G10 Master Link




Product Code	W.L.L.	M.P.L.	M.B.L.	D	L	W	S x H	Weight
	t	t	t	mm	mm	mm	mm	kgs
G100ML76	2.3	4.75	9.2	13	110	60	7x25	0.34
G100ML87	3.5	6.25	14	16	110	60	7x28	0.53
G100ML108	5	10	20	18	135	75	8x30	0.86
G100ML1310	7.6	16.75	30.4	22	160	90	11x43	1.6
G100ML1613	10	25	40	27	180	100	13x43	2.46
G100ML1916	14	35	56	33	200	110	17x55	4.14
G100ML2219	25.1	47.5	100.4	36	260	140	19x60	6.22
G100ML2622	30.8	66.25	123.2	45	340	180	-	12.85
G100ML3222	40	98.25	160	50	350	190	-	16.55
G100ML0032	60	120	240	60	400	200	-	27

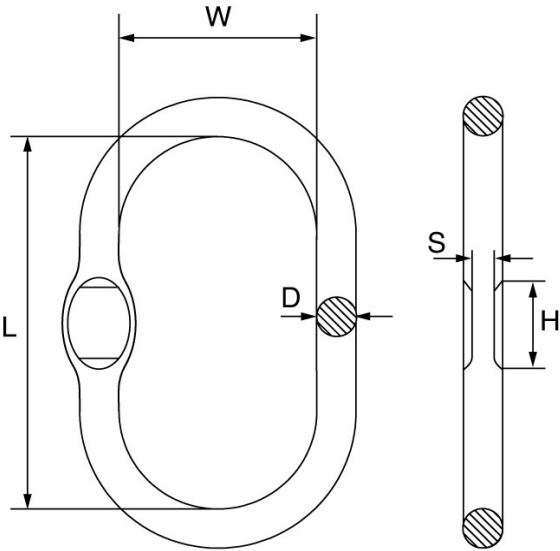

G10 Connector




Chain Dia	W.L.L.	M.P.F.	M.B.F.	Weight	A	B	C	D	K	E	G	Q
mm	t	t	t	kgs	mm	mm	mm	mm	mm	mm	mm	mm
6	1.4	3.5	5.6	0.08	14	16.9	8.5	7	44.5	16	7.4	12
8	2.5	6.25	10	0.17	18.5	22.7	10.5	10	63	24	10.2	14
10	4	10	16	0.34	23	27.7	12.6	12.6	71	28	12.6	18
13	6.7	16.75	26.8	0.68	28	33.2	16.5	16.5	92.5	34	17	23
16	10	25	40	1.22	33.5	39	20	20	106.5	39	20	29.5
20	16	40	64	2.13	42	47.3	25	25	123	42	25.5	35.5
22	19	47.5	76	3	48	55	27	27	137.5	50	27	39
26	26.5	66.25	106	5.22	61	68	32	32	163	63	32	45
32	40	100	160	9.55	80	87	40	40	197	78	38.5	54

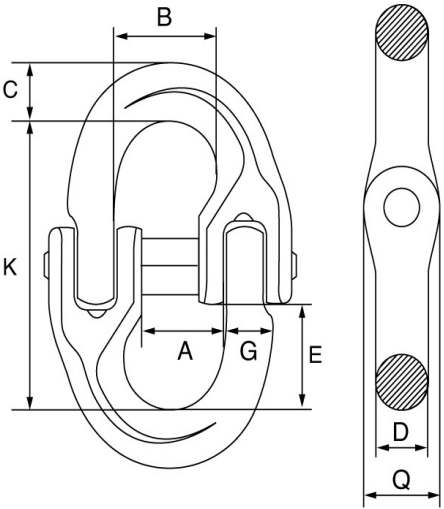

G10 Shortening Eye Grab Hook




Chain Dia	W.L.L.	M.P.F.	M.B.F.	Weight	E	Ø	D	M	W	L	L1
mm	t	t	t	kgs	mm	mm	mm	mm	mm	mm	mm
6	1.4	3.5	5.6	0.15	8	13.5	8	46.5	25.5	73	46
8	2.5	6.25	10	0.3	11	17.5	10.5	53	33.5	93	61
10	4	10	16	0.79	13.5	22	14	74	42	129	85
13	6.7	16.75	26.8	1.67	17	27	18.5	96	53.5	166	104
16	10	25	40	2.74	19	36	22	116	74	186	119
20	16	40	64	4.72	25	44	23	145	87	225	146
22	19	47.5	76	6.9	27	48.5	26	160.5	90	260.5	165.5
26	26.5	66.25	106	11.35	34	52	34	190	110	311	204
32	40	100	160	20.65	41	64	40	229	130	373	246

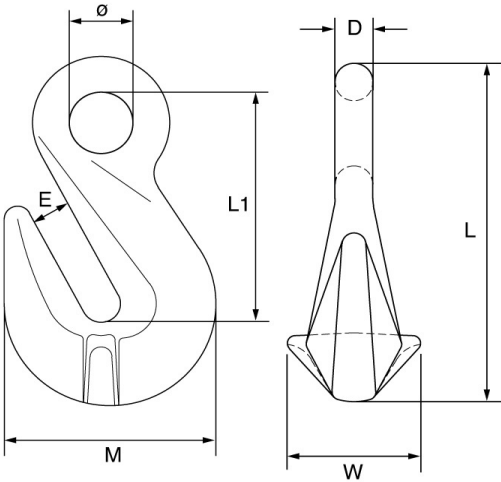

G10 Clevis Sling Hook with Safety Catch




Chain Dia	W.L.L.	M.P.F.	M.B.F.	Weight	A	B	C	D	E	H	M	L	L1	Ø
mm	t	t	t	kgs	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
6	1.4	3.5	5.6	0.33	7.5	32	18	16.5	17	21	68.5	109	73	18
8	2.5	6.25	10	0.6	9.5	37	23	17	23	27.5	88	134	88.5	24
10	4	10	16	1.3	12.5	48	29.5	24	29	32	102	160	105	30
13	6.7	16.75	26.8	2.3	15	59	37	30	38	42	134	203	132	40
16	10	25	40	3.6	18.5	70	46	38	46	50	156	245	161	50
20	16	40	64	7.3	25	85	52	48	50	56	190.5	297	197	53
22	19	47.5	76	12.1	27	100	61	50	65	62	214.5	326	214	68
26	26.5	66.25	106	16.1	30.5	118	70	60	72	73	248	383	247	76
32	40	100	160	27.2	37.5	149	80	71	87	87	281	474	310	81

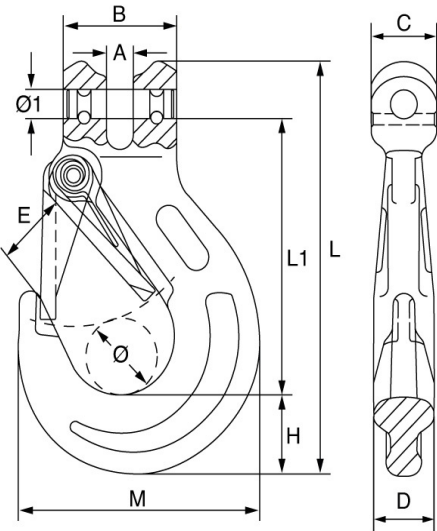

G10 Clevis Self Locking Hook




Chain Dia	W.L.L.	M.P.F.	M.B.F.	Weight	A	B	E	F	R	M	N	L	Ø
mm	t	t	t	kgs	mm	mm	mm	mm	mm	mm	mm	mm	mm
6	1.4	3.5	5.6	0.5	8	32	28	31.5	96	73	15	131	7.6
8	2.5	6.25	10	0.9	9.5	36	36	40	121	90	21.5	163	9.8
10	4	10	16	1.4	12	46	45	46	144	108	26	194	13
13	6.7	16.75	26.8	2.9	15	59	53.6	66	182	137	32.5	251	15.8
16	10	25	40	5.5	18.5	70	61	75	220	168	38	303	19.5
20	16	40	64	8.5	25	85	76.5	80	235	190	50	337	24
22	19	47.5	76	12.1	25.5	98	76	104	271	202	52	386	28
26	26.5	66.25	106	21.15	30	118	99	107	343	251	60	484	33.5
32	40	100	160	43.4	35	150	135	142	423	329	75	601	40.7

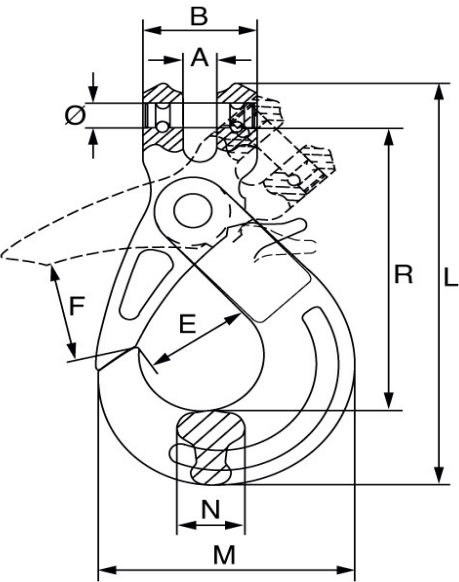

G10 Swivel Eye Self Locking hook



Chain Dia	W.L.L.	M.P.F.	M.B.F.	Weight	A	B	C	D	E	N	H	K	L	W
mm	t	t	t	kgs	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
6	1.4	3.5	5.6	0.67	11.5	13.5	32.5	27	30	15	35	163	196	73
8	2.5	6.25	10	1.21	13	15	41	35	38	20	40	203	244	90
10	4	10	16	2.2	15.5	17.5	48	45	48	26	51	244	289	108
13	6.7	16.75	26.8	4.4	17	19	55	53.6	63	32.5	59	295	354	138
16	10	25	40	7.48	21.5	26	61	62	75	38	66	348	424	170
20	16	40	64	13.75	26.5	28.5	76	76	80	50	76	399	489	191
22	19	47.5	76	18.81	33	33	97	79	95	52	100	469	566	205

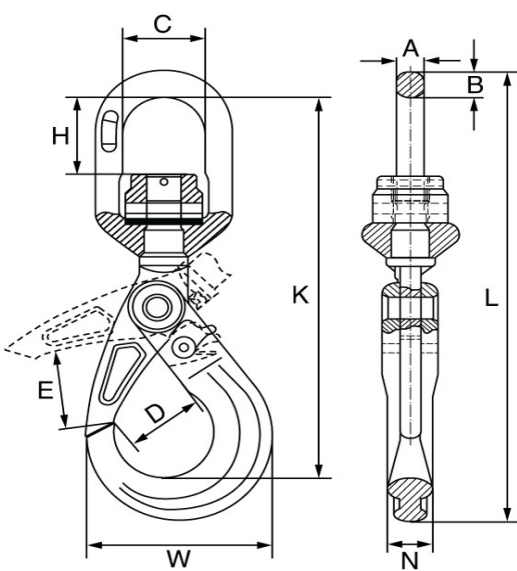

G10 Clevis Foundry Hook



Chain Dia	W.L.L.	M.P.F.	M.B.F.	Weight	A	B	C	E	M	N	H	L
mm	t	t	t	kgs	mm	mm	mm	mm	mm	mm	mm	mm
6	1.4	3.5	5.6	0.42	8	32	18	49	100	17	19.3	126
8	2.5	6.25	10	0.8	9.5	36	23	62	128	20	27	160
10	4	10	16	1.42	12.5	48	29.5	72	153	25	31	192
13	6.7	16.75	26.8	2.88	15	59	35	88	186	33	39	232
16	10	25	40	5.1	18.5	70	46	103	218	40	50	284

